


**Explosion-Proof** Electromechanical lubricator specifically designed for hazardous areas where **Class I, Division II, Group C & D** certification is required.

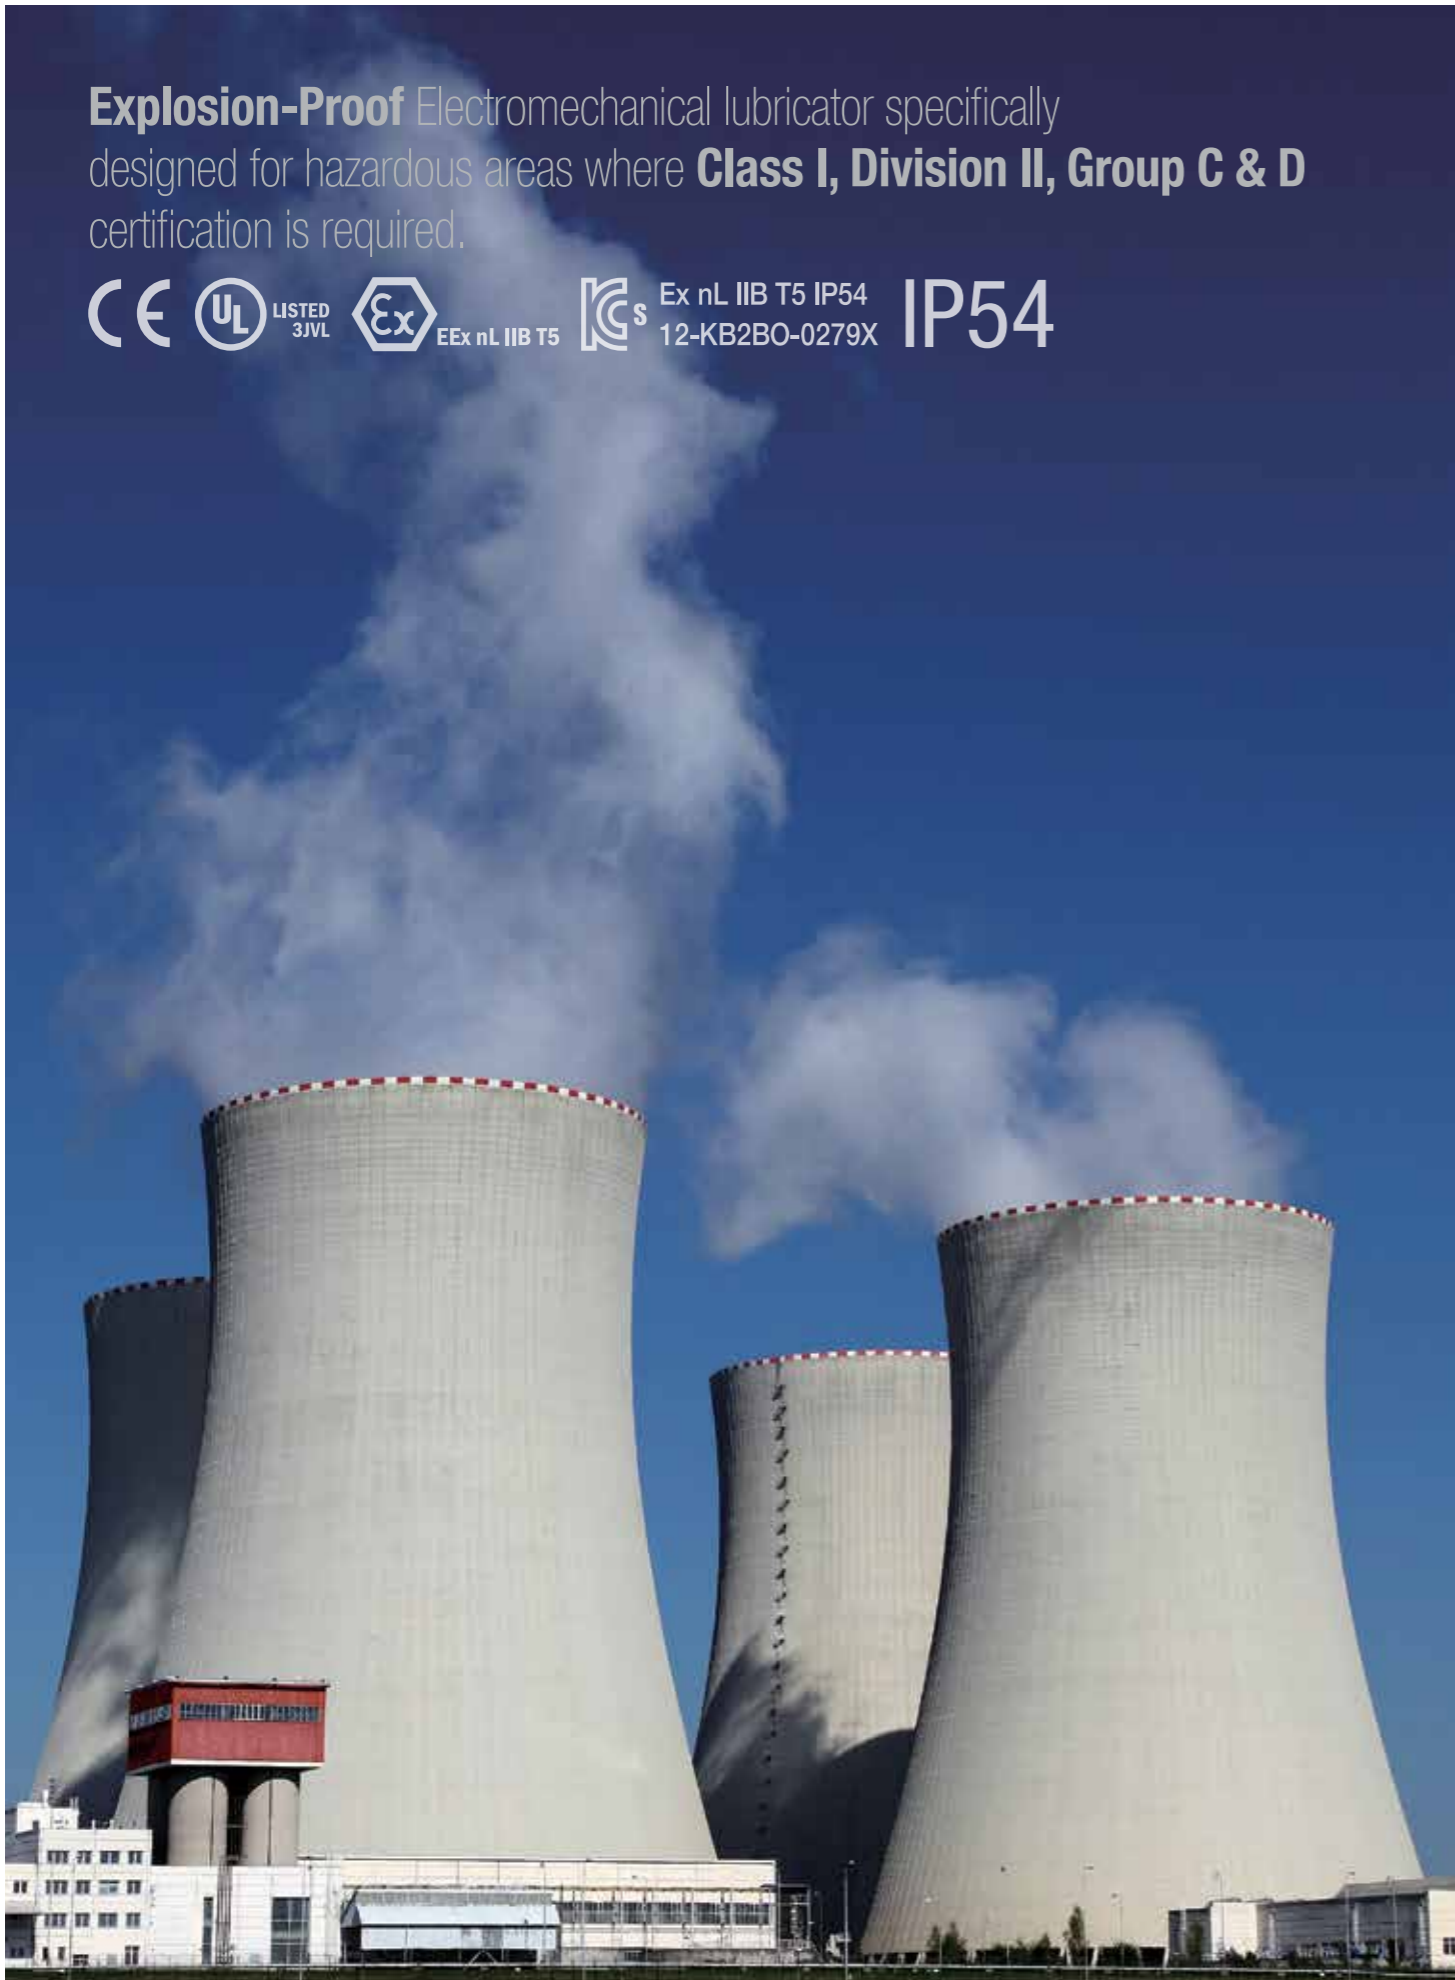

# Pulsarlube EX

## Specifically Designed for Hazardous Areas

The Pulsarlube EX is specially engineered to meet requirements for use in hazardous areas and to ensure safe and reliable lubrication solutions to your valuable equipment.

### Features & Benefits



Easy to program with built-in LCD and simple button controls



Specifically designed for places where Class I, Division II, Group C & D certifications are required



Auto Lock Out mode to prevent unintentional mode changes



Substantial savings with the use of replaceable grease pouches and battery packs



\* For replacement kit information, please refer to Service Pack on Page 15.

### Specifications

**Grease Pouch Capacity**  
125ml/250ml (replaceable)

**Operating Method**  
DC 4.5V Battery Pack

**Operating Pressure**  
Max. 15kg/cm<sup>2</sup> (200psi)

**Operating Temperature**  
-15°C~60°C (5°F~140°F)

**Dispensing Periods**  
1, 2, 3, 6, 12 month & H (15 days)

**Remote Installation**  
Max. 3m (10ft) with O.D. Ø6mm tube (Direct mount is preferable)

**Multi-Point Installation**  
Single point only

**IP Code**  
IP54


**Certifications**  
ATEX, KCs, UL, CE

### Applications



PETROCHEMICAL PLANTS    NUCLEAR POWER PLANTS    OIL & GAS    THERMAL POWER PLANTS    ELECTRIC MOTORS

### Cross Section

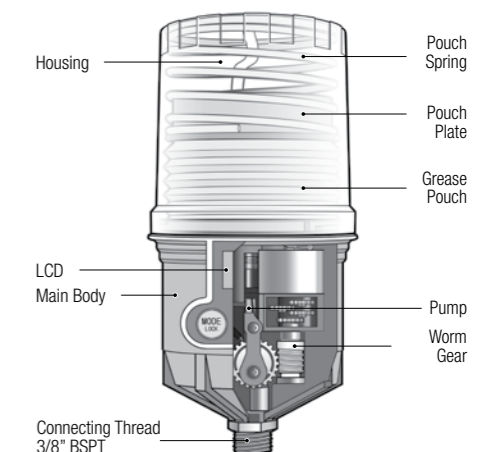

**Product Dimension**  
EX125 : Ø91mm (3.60") x 181mm (7.13") (H)  
EX250 : Ø91mm (3.60") x 210mm (8.27") (H)