

Pulsarlube OL500

Compatible with a Wide Range of Oil Viscosity

The Pulsarlube OL500 is specifically designed to deliver a fresh, consistent, and precise amount of oil to all of the vital parts of your rotating equipment.



* For more information on installation, please refer to the website.


Features & Benefits

Avg. 10kgf/cm²	Can lubricate up to 4 points, Max. 6m (20ft) per point
Accessory Kit	Applicable Oil / Able to handle a wide range of oil viscosity
LCD	Easy to program with built-in LCD and simple button controls
Easy Refill	Refillable oil reservoir

Specifications

Oil Volume Capacity 500ml (refillable)	Remote Installation Max. 6m (20ft) with O.D. Ø4mm tube
Operating Method DC 4.5V Battery Pack	Multi-Point Installation Max. 3m (10ft) with O.D. Ø4mm tube (up to 4 lube points)
Operating Pressure 10kgf/cm ² (depends on oil viscosity)	Oil Viscosity Range 100~10,000 cSt@40°C
Operating Temperature Standard Alkaline Battery : -15°C~60°C (5°F~140°F)	* Special instructions available for 10~100 cSt@40°C.
Dispensing Periods 1, 2, 4, 6, 12, 18, 24 month & H (15 days)	

Cross Section

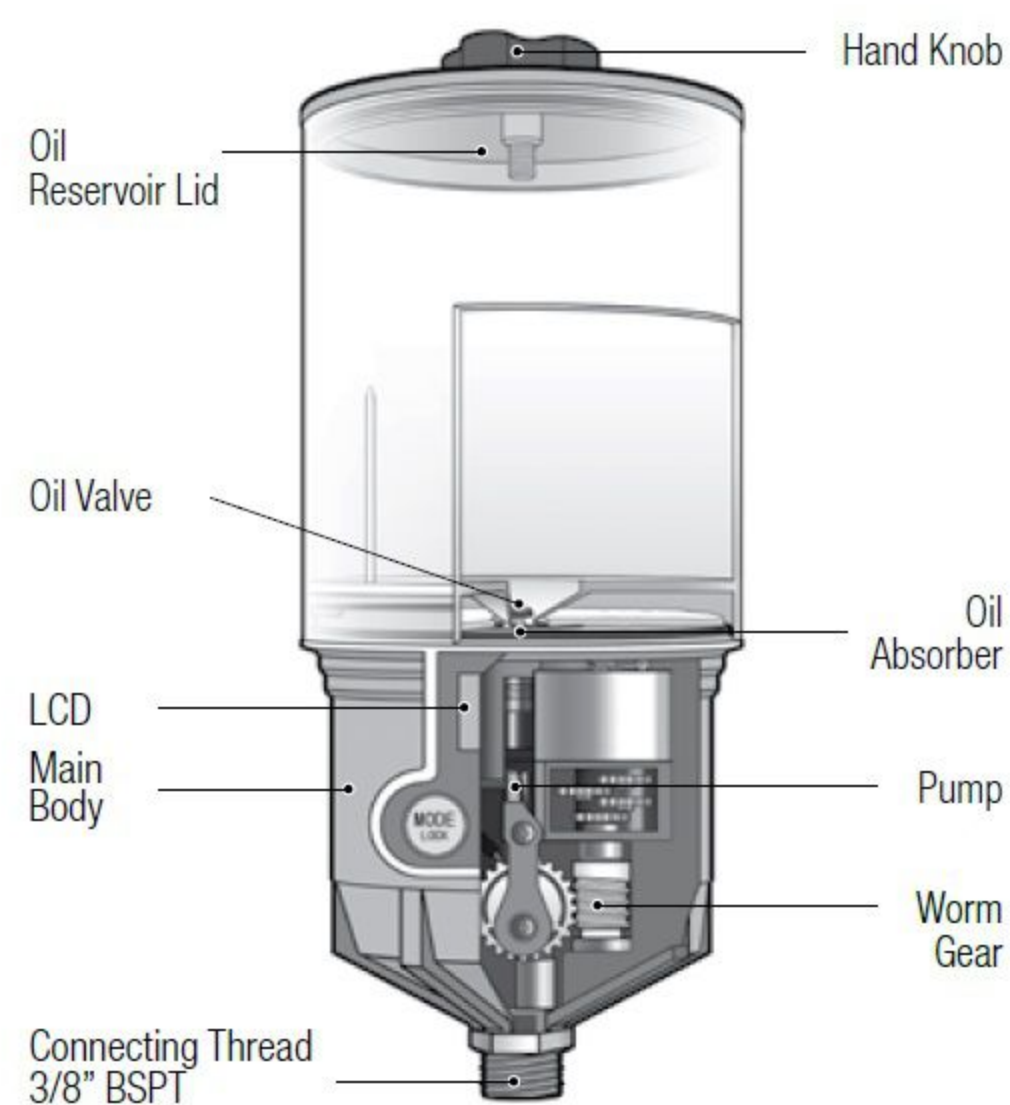

Product Dimension
OL500: Ø94 mm (3.70") x 229 mm (9.02") (H)

Applications



ESCALATORS WIRE ROPES CHAINS